

12/24V

Réf. **025356**



CHARGER

Automatic loading : in "Electronic control" position, this device loads without supervision and it assures a better protection of the batteries and of the on-board electronic of the vehicle.


It can be connected permanently thanks to a regulation by indication of loading. Diagnostic indicator : loading / battery loaded.

Manual loading : loading with supervision and manual stop by the user. It permits a reloading without voltage limitation in order to restore discharged and sulphated batteries or to make rapid loadings.

STARTER

In «Electronic control» position, it protects the vehicle against overvoltage thanks to an automatic monitoring system which controls the excess voltage output during the start. With remote control switch.

- ▶ Mains supply protection
- ▶ Protection against short circuit, reversal polarity and over voltage
- ▶ Copper winding
- ▶ Cables Ø 25 mm², 2 m. Brass clips

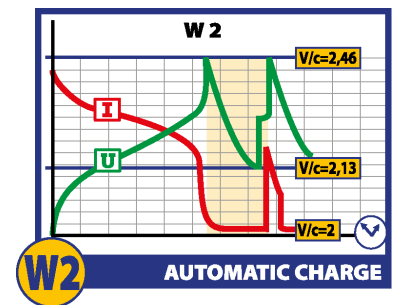

Instant	50 Ah	100 Ah	150 Ah
Precharge (20 min.)			

12V 24V

CE EN 60335-2-29

50/60Hz	I ₁	Battery	Reg	EFFICACE /RMS	MOYEN /AVERAGE	AUTOMATIC	POS. MANUAL	MIN. MAX. Ah	START	FUSE	cm	kg	
A	A	A	A	A	A	A	A	A	A	A	A	A	
1V/C	0V/C												
230V	16A	12/24V	electronic 10>45	70A	45A	✓	✓	20>1000	400 700	✓	1x200A	31x36,5x65	28,5