



## Axle stands:



|   | Model    | Max (Ton) | A (mm) | B (mm) | C (mm) | P (mm)  | Kg   |
|---|----------|-----------|--------|--------|--------|---------|------|
| 1 | CAX 2H   | 2         | 430    | 740    | 445    | 6       | 3.7  |
| 2 | CAX 3    | 3         | 315    | 540    | 330    | 6       | 3.9  |
| 3 | CAX 5    | 5         | 365    | 605    | 420    | 6       | 6.5  |
| 4 | CAX 8    | 8         | 370    | 600    | 430    | 6       | 9.7  |
| 5 | CAX 8H   | 8         | 550    | 970    | 600    | 7       | 13.8 |
| 6 | CAX 12S  | 12        | 320    | 500    | 230    | Spindel | 10.0 |
| 7 | CAX 12HS | 12        | 475    | 725    | 395    | Spindel | 15.0 |

## Bottle jacks:




|   | Model    | Max (Ton) | A (mm) | B (mm) | C (mm) | D (mm) | E (mm)  | F (mm) | Kg  |
|---|----------|-----------|--------|--------|--------|--------|---------|--------|-----|
| 1 | CBJ 3    | 3         | 172    | 156    | 60     | 388    | 90X100  | 25     | 2.3 |
| 2 | CBJ 5    | 5         | 200    | 192    | 70     | 462    | 100X100 | 30     | 3.0 |
| 3 | CBJ 10   | 10        | 226    | 242    | 90     | 558    | 120X130 | 40     | 5.3 |
| 4 | CBJ 15   | 15        | 216    | 202    | 65     | 483    | 120X130 | 40     | 8.5 |
| 5 | CBJ 20   | 20        | 214    | 214    | 50     | 508    | 130X140 | 45     | 8.5 |
| 6 | CBJ 25   | 25        | 246    | 202    | 55     | 503    | 130X150 | 50     | 11  |
| 7 | CBJ 30   | 30        | 236    | 182    | 55     | 473    | 140X160 | 60     | 11  |
| 8 | CBJ-T 10 | 10        | 234    | 310    | -      | 544    | 130X150 | 40     | 14  |

## Fork lift jack:

### CFLJ-5

- Ideal for forklifts and agricultural machinery.
- Ergonomically designed handle for operator comfort. Rubber coated.
- Additional foot pedal pumping feature provides fast saddle raising to the load.
- Safety lowering control valve for safe lowering even under maximum load.
- Ultra low entry height.

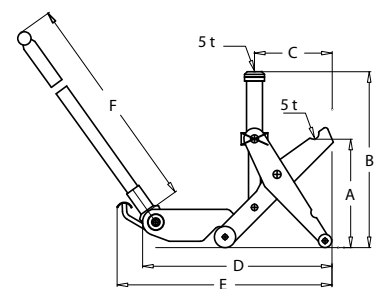

|   | Model  | Max (Ton) | A (mm) | B (mm)  | C (mm)  | D (mm)  | E (mm)  | F (mm) | Kg |
|---|--------|-----------|--------|---------|---------|---------|---------|--------|----|
| 1 | CLFJ-5 | 5         | 58-410 | 360-665 | 510-330 | 840-700 | 885-820 | 1050   | 44 |