


AIRBLOK DR/SD Inverter





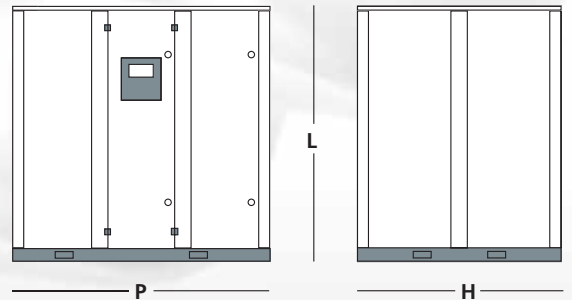


Compressori d'aria super silenziosi rotativi a vite con inverter
Super silent rotary screw air compressors with speed drive control



AIRBLOK DR/SD

Trasmissione diretta / Direct drive



Type	 dB (A)	ISO 1217 min			ISO 1217 max			 bar	 psi	 HP	 kW	 BSP	LxPxH			 kg / lb
		l/min	CFM	m³/h	l/min	CFM	m³/h						mm / in	mm / in	mm / in	
AIRBLOK 402 DR-SD	68	1540	54	92.4	4950	174	297	8	116				1750	950	1700	980
		1420	50	85.2	4400	155	264	10	145	40	30	1-1/4"	68.9	37.4	66.9	2161
		1250	44	75	3800	134	228	13	188							
AIRBLOK 502 DR-SD	69	2050	72	123	6100	216	366	8	116				1750	950	1700	1050
		1900	67	114	5600	197	336	10	145	50	37,5	1-1/4"	68.9	37.4	66.9	2315
		1750	62	105	4900	173	294	13	188							
AIRBLOK 752 DR-SD	72	2950	104	177	9000	319	540	8	116				2200	1100	1950	1600
		2830	100	170	8050	284	483	10	145	75	55	1-1/2"	86.6	43.3	76.7	3527
		2710	96	162.6	7300	258	438	13	188							
AIRBLOK 1002 DR-SD	73	2970	105	178.2	12600	445	756	8	116				2200	1100	1950	1800
		2850	101	171	10200	350	612	10	145	100	75	1-1/2"	86.6	43.3	76.7	3968
		2780	98	166.8	8850	313	531	13	188							
AIRBLOK 1252 DR-SD	75	2850	101	171	14000	494	840	8	116	125	90	1-1/2"	2200	1100	1950	1900
		2791	98	167.5	13000	459	780	10	145				86.6	43.3	76.7	4189

Alimentazione standard 400V/50Hz/3~. / Standard input 400V/50Hz/3~.

Disponibili versioni / Version available: 230V/50Hz/3 - 220V/60Hz/3 - 380V/60Hz/3