


AMI 4,0 PREMIUM

- Load capacity 4000 kg
- Lever control
- Asymmetric design
- Economically profitable hydraulic drive
- Double-acting roof dent protection
- Variety of heights 4100 mm | 4400 mm | 4600 mm | 4800 mm
- Set of extensions 50 mm | 100 mm
- Ergonomic cover
- Arm lock (SLS - self locking system)
- Easy to operate
- Czech made
- Complies to requirements of ČSN EN 1493:2023



2 x 3-STAGE ARMS
2 x 2-STAGE LONG ARMS
(STANDARD)

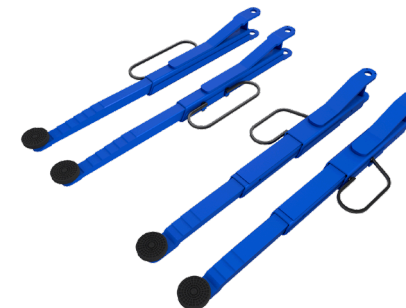

SET OF EXTENSIONS 50 mm | 100 mm
(STANDARD)



TROLLEY COVER "PUR3"
(STANDARD)



VARIANTS OF ARM CONFIGURATIONS
(MODEL CONFIGURATIONS)



VARIANTS OF VULCANISED PADS AND ADAPTERS
(ACCESSORIES)



VARIANTS OF ELECTRO BOXES
(ACCESSORIES)



ELECTRIC REELS
(ACCESSORIES)



TECHNICAL DATA



ADDITIONAL ACCESSORIES

Application:
Passenger vehicles | commercial vehicles

Maximum load capacity:
4000 kg

Maximum clearance height:
3920 mm | 4250 mm | 4450 mm | 4650 mm

Maximum clearance width:
2505 mm

Maximum arm height:
2010 mm - 2040 mm

Minimum arm height:
90 mm - 120 mm

Column clearance:
2850 mm

Overall width:
3420 mm

Total height:
4100 mm | 4400 mm | 4600 mm | 4800 mm

Motor power:
3,0 kW

Minimum thickness of concrete floor C20/25:
135 mm

