



AIRBLOK BD/SD Inverter

Compressori d'aria super silenziosi rotativi a vite con inverter
Super silent rotary screw air compressors with speed drive control

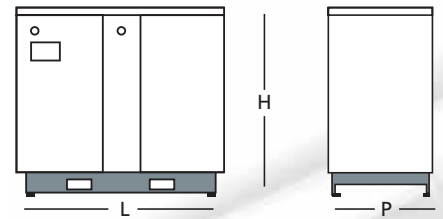

AIRBLOK 102 ÷ 302

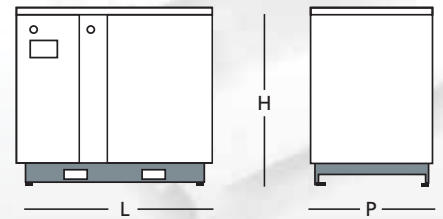

AIRBLOK 402 ÷ 602

AIRBLOK BD/SD 252 ÷ 602

CE

Trasmissione a cinghia / Belt drive

Type	 dB (A)	ISO 1217			ISO 1217						LxPxH			
		min	min	max	min	max	max							
		l/min	CFM	m ³ /h	l/min	CFM	m ³ /h	bar	psi	HP	kW	BSP	mm / in	kg / lb
AIRBLOK 252 BD-SD	66	820	29	49.2	2900	102	174	8	116	25	18.5	1	1215 900 1300	523
		780	27.5	46.8	2540	89.7	152.4	10	145					
		750	26.5	45	2120	74.9	127.2	13	188					
AIRBLOK 302 BD-SD	67	860	30.3	51.6	3400	120	204	8	116	30	22	1	1215 900 1300	543
		810	28.6	48.6	3120	110	187	10	145					
		780	27.5	46.8	2670	94.2	160	13	188					
AIRBLOK 402 BD-SD	65	1715	60.6	102.4	4900	173	294	8	116	40	30	1-1/4"	1500 1000 1450	963
		1620	57.2	97.2	4370	154	262	10	145					
		1430	50.5	85.8	3770	133	226	13	188					
AIRBLOK 502 BD-SD	65	2140	75.4	128.4	6085	215	365	8	116	50	37	1-1/4"	1500 1000 1450	971
		1940	68.4	116.4	5530	195	331.8	10	145					
		1830	64.7	109.8	4800	169	288	13	188					
AIRBLOK 602 BD-SD	65	2600	91.8	156	7400	261	444	8	116	60	45	1-1/4"	1500 1000 1450	1033
		2400	84.8	144	6500	229	390	10	145					
		2100	74.2	126	5500	194	330	13	188					

Alimentazione standard 400V/50Hz/3~. / Standard input 400V/50Hz/3~.
 Disponibili versioni / Version available: 230V/50Hz/3 - 220V/60Hz/3 - 380V/60Hz/3